


DIAGNOSIS AND TESTING (Continued)

EATC System Vacuum Schematic and Selector Test

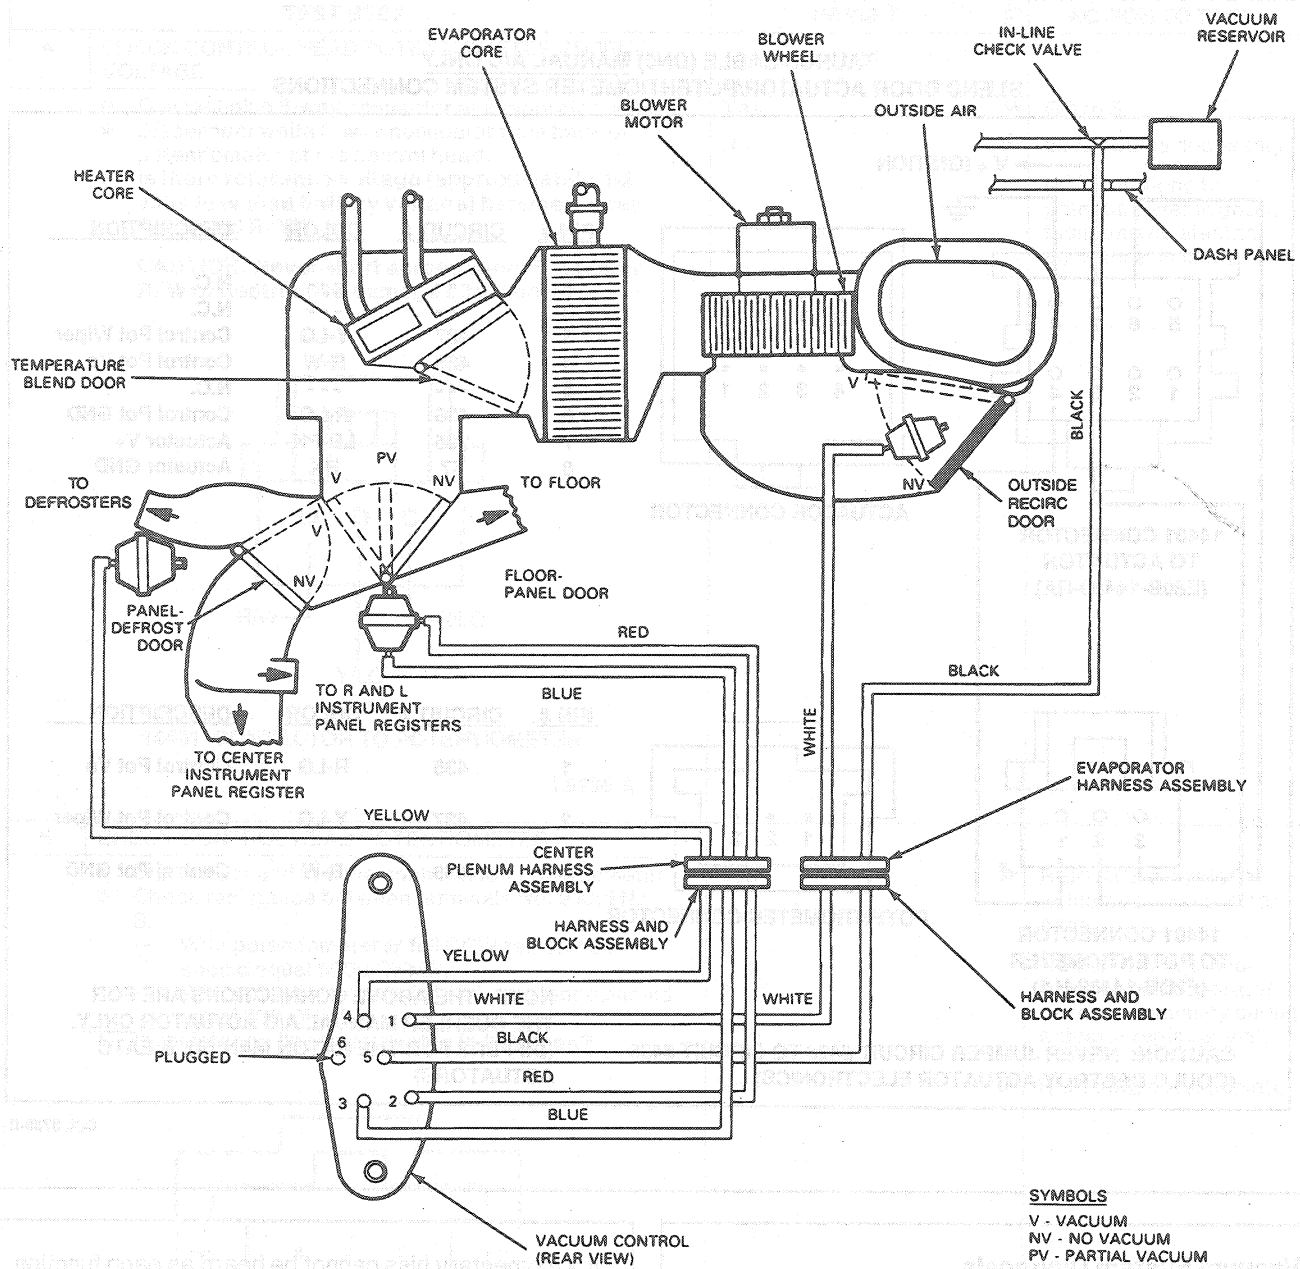

**SYMBOLS**  
 V - VACUUM  
 NV - NO VACUUM  
 PV - PARTIAL VACUUM

VACUUM PORT	FUNCTION	SELECTION						
		OFF	DEFROST	FLOOR — PANEL (MIX)	FLOOR	FLOOR — PANEL (HI-LO)	PANEL	RECIRC.
1	Outside — Recirc	V	NV	NV	NV	NV	NV	V
2	Full Floor	NV	NV	NV	V	NV	NV	NV
3	Floor — Panel (Partial)	NV	NV	V	V	V	NV	NA
4	Panel — Defrost	NV	NV	NV	NV	V	V	V
5	Source	V	V	V	V	V	V	V
6	Plugged	—	—	—	—	—	—	—

CCL 2650-B