


REMOVAL AND INSTALLATION (Continued)

Finish Panel, Upper Rear Corner

Wagon

Removal and Installation



1. Remove liftgate header rail garnish moulding retaining screws and moulding.

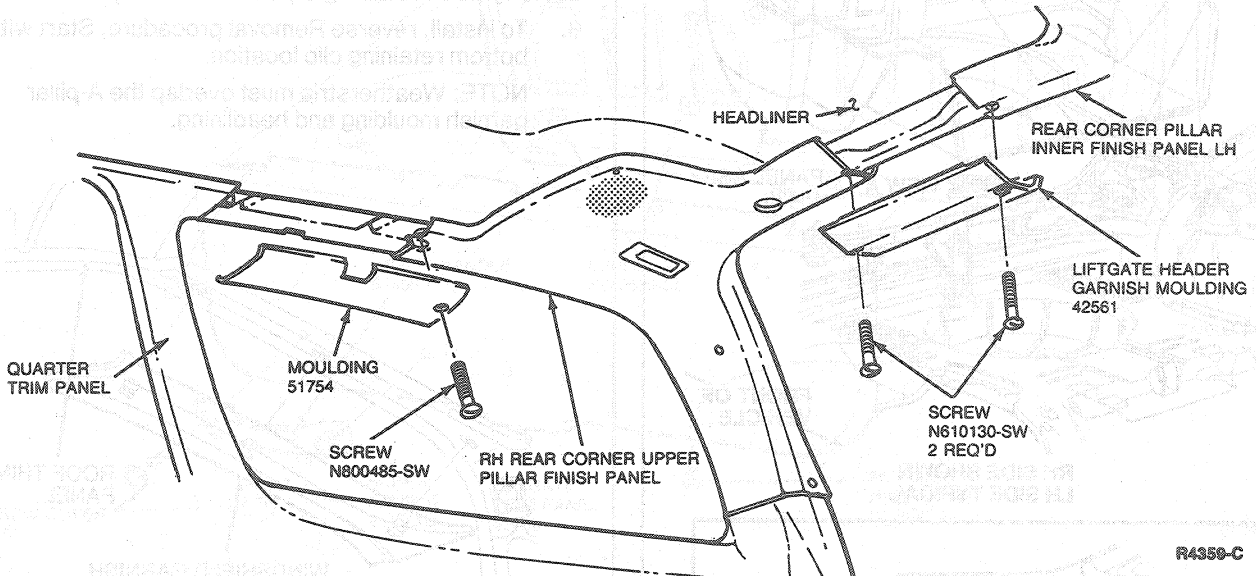

R4359-C

2. Remove assist handle retaining screws and handle.

3. Remove screws retaining corner finish panel and pull panel far enough away to disconnect wiring connectors. Disconnect wiring and remove panel.
4. To install, reverse Removal procedure.

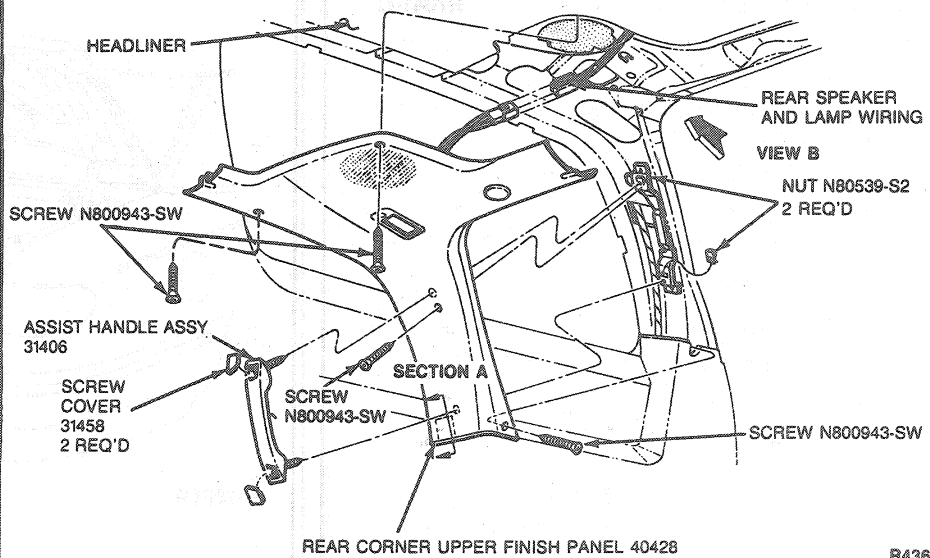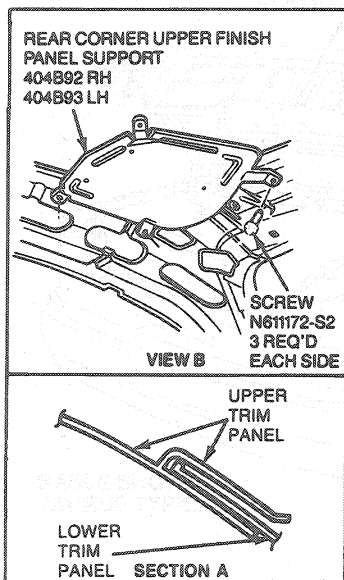

R4360-E