
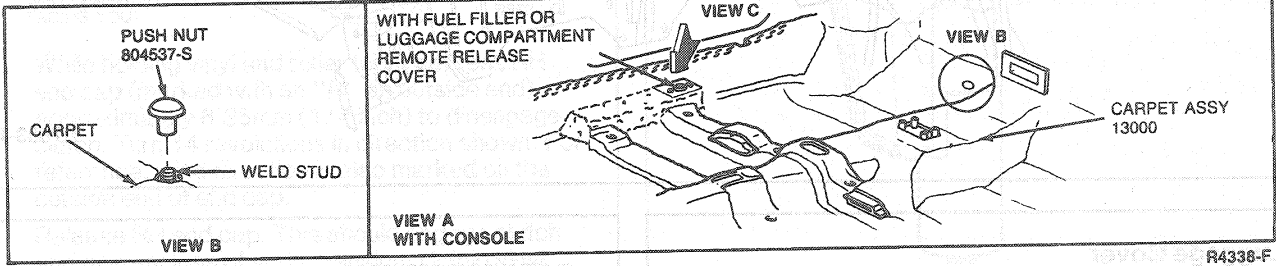



REMOVAL AND INSTALLATION (Continued)

Carpet, Floor—Front

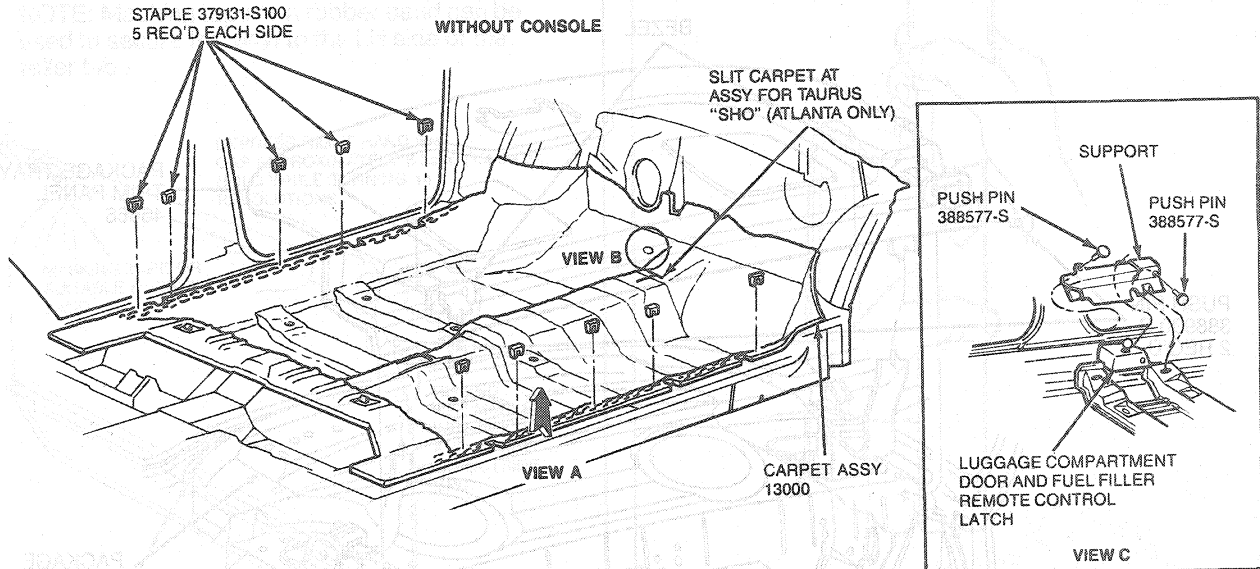

R4338-F

Carpet, Luggage Compartment Station Wagon

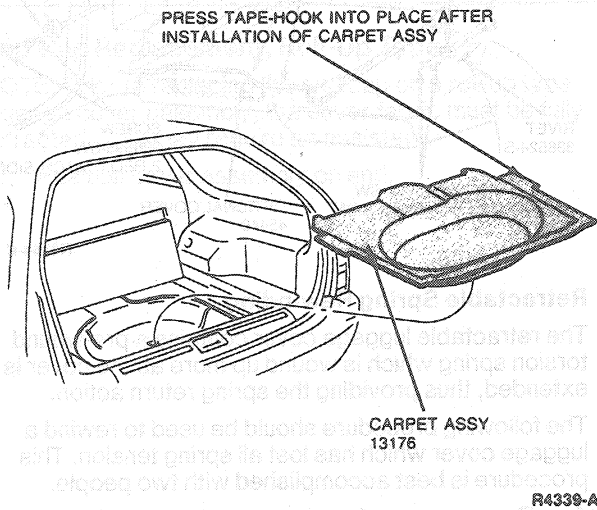

Trim Panel, Package Tray

Sedan

Removal and Installation

1. Remove rear seat back and seat cushion assemblies. Refer to Section 01-10A.
2. Remove roof side rear trim panel.
3. Remove high-mount stoplamp.
4. Remove child restraint tether attachment, if so equipped. Refer to Section 01-20A.
5. Remove safety belt bezels.
6. Remove push pins retaining package tray trim panel.
7. Remove quarter trim panel.
8. Remove rear safety belt retaining bolts at quarter panel. Refer to Section 01-20A.
9. Remove trim panel by pulling panel forward and slightly upward from package tray and pull belts from package tray trim panel.