

## REMOVAL AND INSTALLATION (Continued)


(Continued)

Item	Part Number	Description
1	63804	Cover Assy
2	600A88	Pad and Frame Assy
3	—	Hog Rings
4	631A08	Wire - 53.5 Inch Tie Down
5	66698	Wire - 9 Inch Tie Down

## Seat Back Trim Cover, Rear

## Removal

1. Remove seat back assembly from vehicle and place it on a clean surface as outlined.
2. Remove armrest as outlined, if so equipped.
3. Remove hog rings retaining trim cover.
4. Remove trim cover.
5. Remove tiedown wires from their listings. Transfer them to their respective listings in new trim cover.

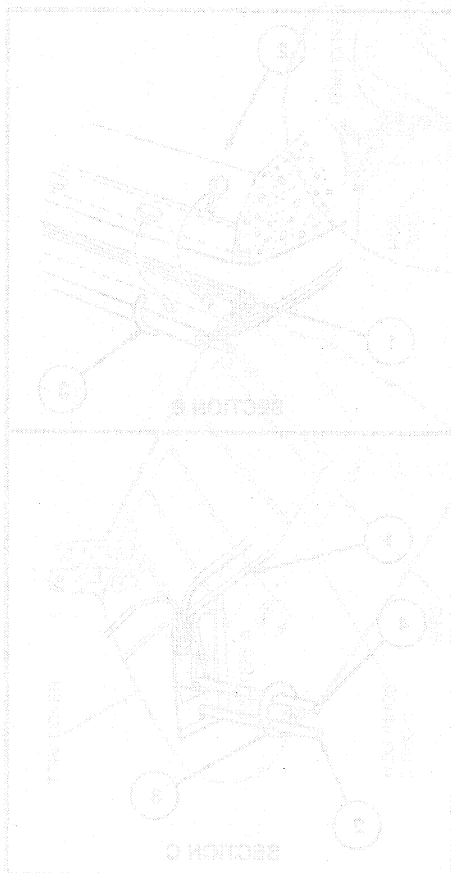

## Installation

1. Position trim cover evenly to back panel and pad assembly.
2. Hog ring the horizontal tiedown listings to pad assembly at each location.
3. Hog ring trim cover to pad and frame assembly.
4. Install armrest as outlined, if so equipped.

