


REMOVAL AND INSTALLATION (Continued)

11. Install windshield / rear window assembly onto vehicle, taking care to align marks on glass to body. This must be done within 15 minutes of applying urethane.

12. Install windshield wiper arms, blades and leaf screen.  
13. Install rear view mirror.






**CAUTION: Use only urethane for service of air and water leaks in urethane seal.**

Windshield

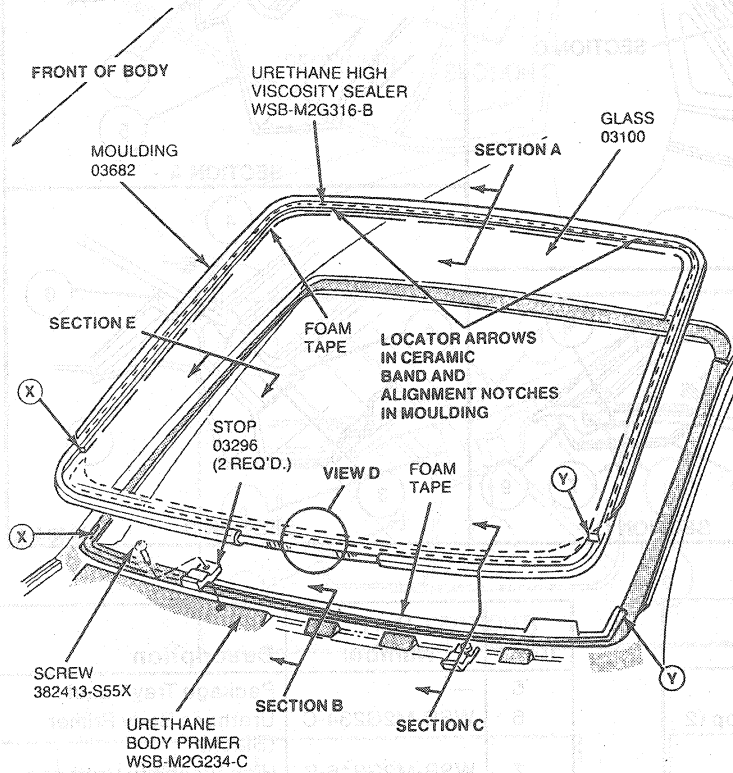

NOTE:

- WINDSHIELD-MOULDING ASSY TO BE INSTALLED AFTER GLASS IS CLEANED.
- USE ARROWS IN CERAMIC BAND AND NOTCHES IN MOULDING FOR MOULDING TO GLASS ALIGNMENT.
- MOULDING INSTALLATION TO BEGIN IN UPPER CORNERS, FULLY SEATING THRU RADIUS, THEN WORK MOULDING ONTO GLASS ALONG TOP, SIDES AND LOWER EDGES.
- FOAM TAPE TO BE APPLIED TO UNDERSIDE OF GLASS BETWEEN POINTS X AND Y AS SHOWN.
- FOAM TAPE IS TO BE APPLIED TO COWL TOP AS SHOWN.

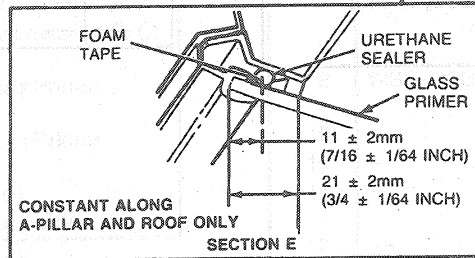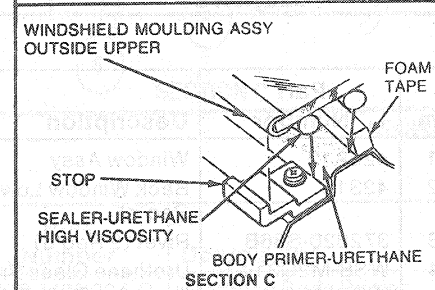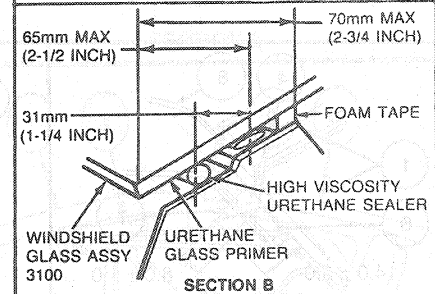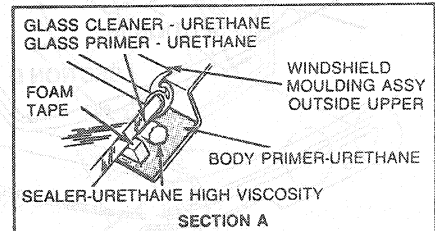

N6580-E