
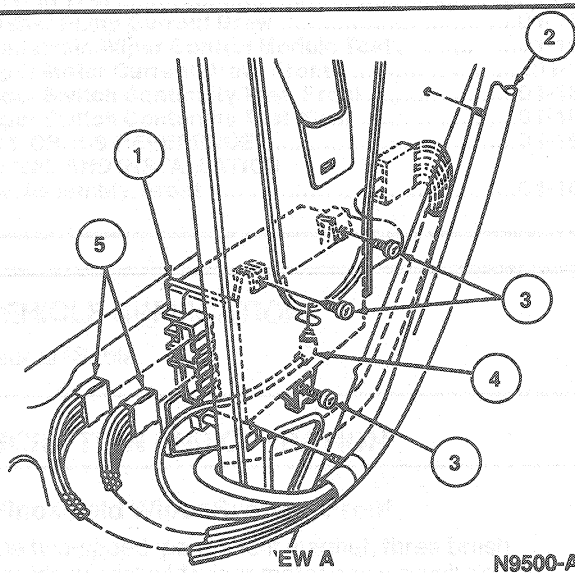


REMOVAL AND INSTALLATION (Continued)

2. Disconnect two connectors and antenna connector.
3. To install, reverse Removal procedure.



N9500-A

Item	Part Number	Description
1	15K602	Remote Keyless Entry Module
2	14A488	Wiring Harness Assembly
3	56903-S2	Screw (3 Req'd)
4	—	Antenna Connector (part of 14A488 Wiring Harness Assembly)
5	—	J1, J2 Connectors (part of 14A488 Wiring Harness Assembly)



TN9500A

Antenna

Removal and Installation

NOTE: This vehicle uses an antenna that is part of a wiring harness. **DO NOT** remove existing antenna from wire harness.

1. Disconnect antenna connector from module and tape securely out of way.
2. Connect new antenna connector to module.
3. Install new antenna into vehicle, taping along wire harness path followed by old (unconnected) antenna. Secure using tie-wrap or tape.

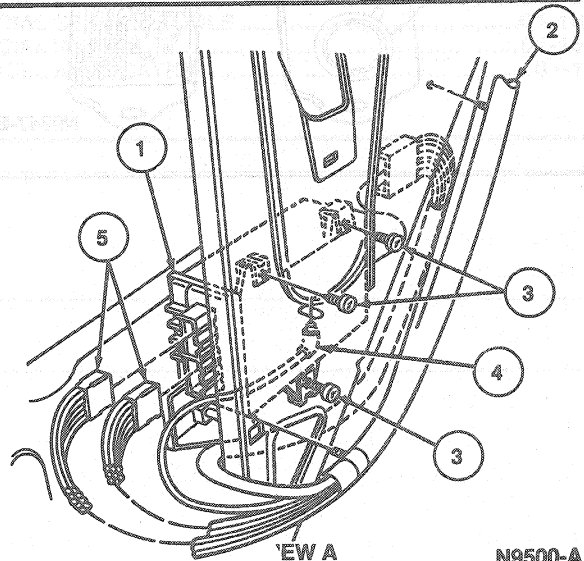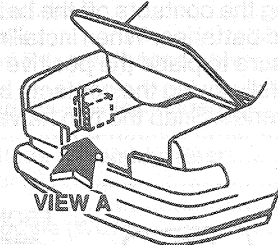

N9500-A

Item	Part Number	Description
1	15K602	Remote Keyless Entry Module
2	14A488	Wiring Harness Assembly
3	56903-S2	Screw (3 Req'd)
4	—	Antenna Connector (part of 14A488 Wiring Harness Assembly)
5	—	J1, J2 Connectors (part of 14A488 Wiring Harness Assembly)

TN9500A