


REMOVAL AND INSTALLATION (Continued)


Sable

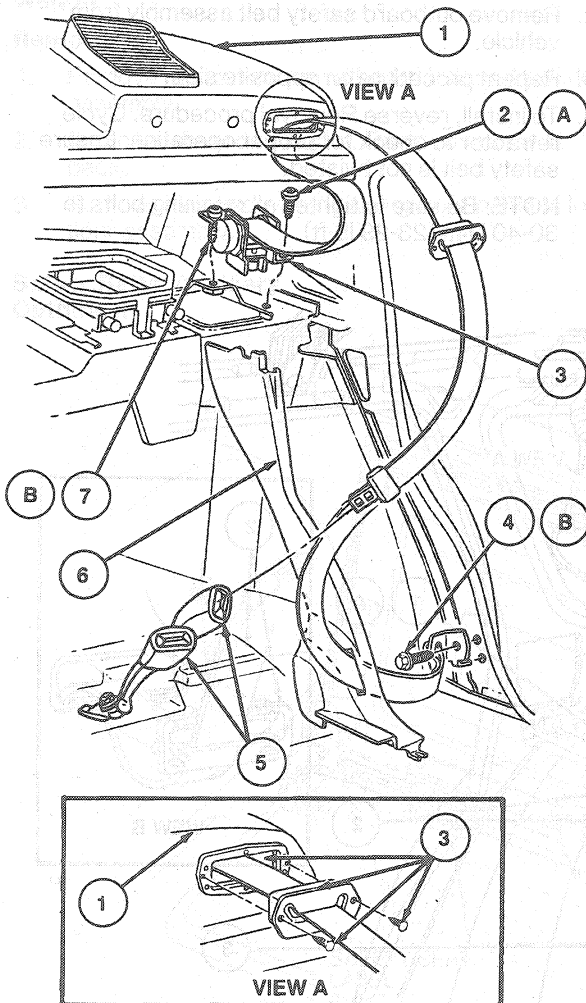

R4962-D

Item	Part Number	Description
1	46668	Package Tray Trim Panel Assy
2A	N801010-S40	Screw (1 Req'd Each Side)
3	611B68	Rear Safety Belt and Retractor Assy
4B	389370-S100	Bolt (1 Req'd Each Side)
5	60044	Rear Safety Belt Cable and Buckle Assy
6	27790	Quarter Trim Panel Assy
7B	389370-S100	Screw
A		Tighten to 22-34 N·m (17-24 Lb·Ft)
B		Tighten to 30-43 N·m (23-31 Lb·Ft)

Taurus

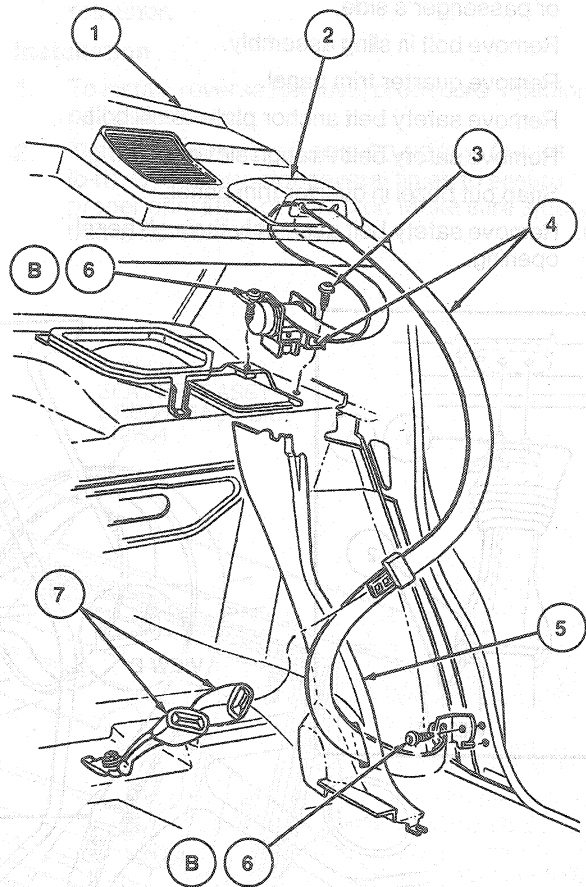

R4961-E

Item	Part Number	Description
1	46668	Package Tray Trim Panel Assy
2	13C46	Rear Shoulder Belt Retractor Cover
3A	N801010-S40	Screw (1 Req'd Each Side)
4	611B68	Rear Safety Belt and Retractor Assy
5	27790	Quarter Trim Panel Assy
6B	389370-S100	Bolt (1 Req'd Each Side)
7	60044	Rear Safety Belt Cable and Buckle Assy
A		Tighten to 22-34 N·m (17-24 Lb·Ft)
B		Tighten to 30-40 N·m (23-29 Lb·Ft)

Station Wagon

Removal and Installation

1. Remove rear seat cushion. Refer to Section 01-10A.
2. Remove rear seat back. Refer to Section 01-10A.
3. Remove buckle end anchor plate nuts and remove buckle end belts.