


## DESCRIPTION (Continued)

The vehicles are equipped with galvanized steel disc brake splash shields. The shields are attached to the front knuckle with three pop rivets per side and are not interchangeable side-to-side.

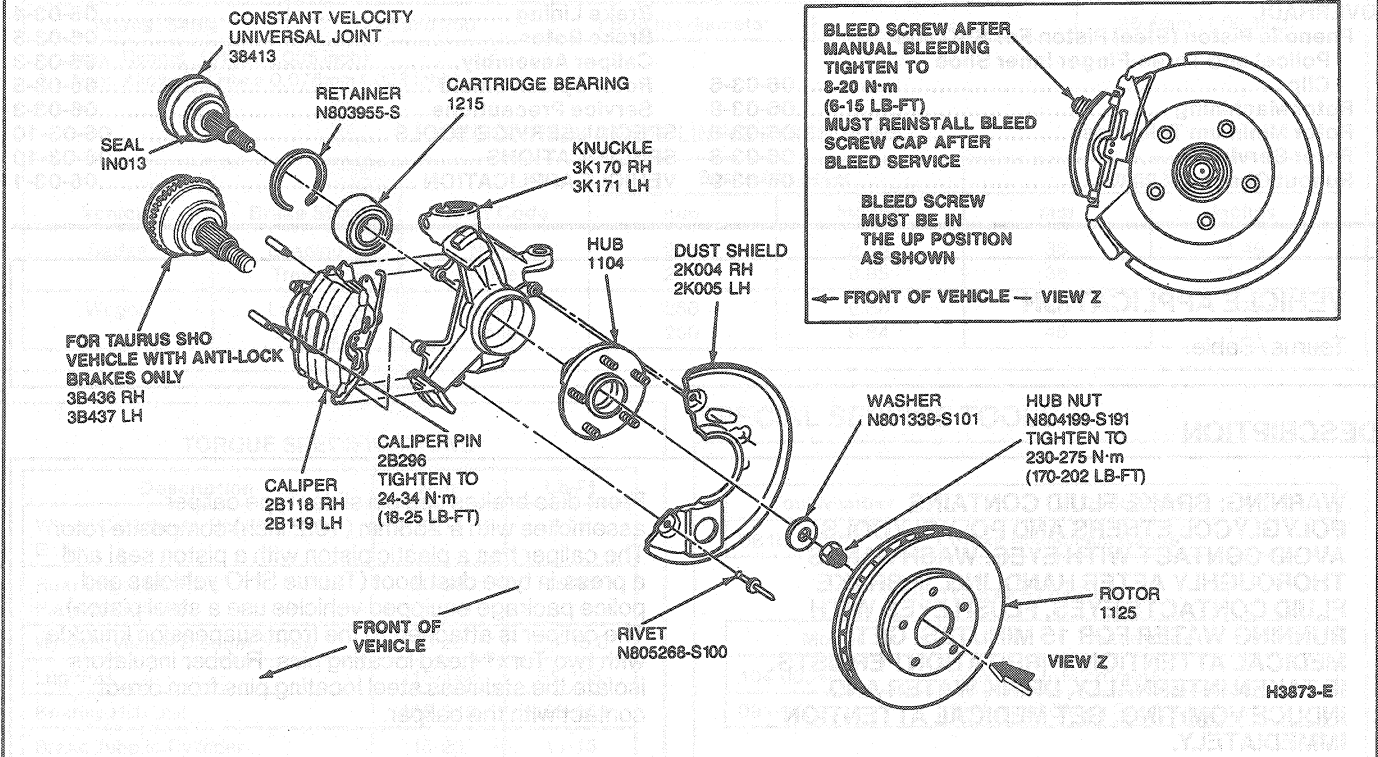

The inner shoes are interchangeable left to right and use a three-finger clip that fits inside the caliper piston. The outer shoes are not interchangeable and use a dual-purpose clip which holds the brake shoes on the caliper housing and also prevents caliper rattle. The flanges on both inner and outer shoe assemblies slide on machined surfaces of the knuckle assembly.