


REMOVAL AND INSTALLATION (Continued)

- 4. Position U-bolt. Tighten to 34-46 N·m (26-33 lb·ft).

3.8L MFI

- 5. Check system for leaks and lower vehicle.

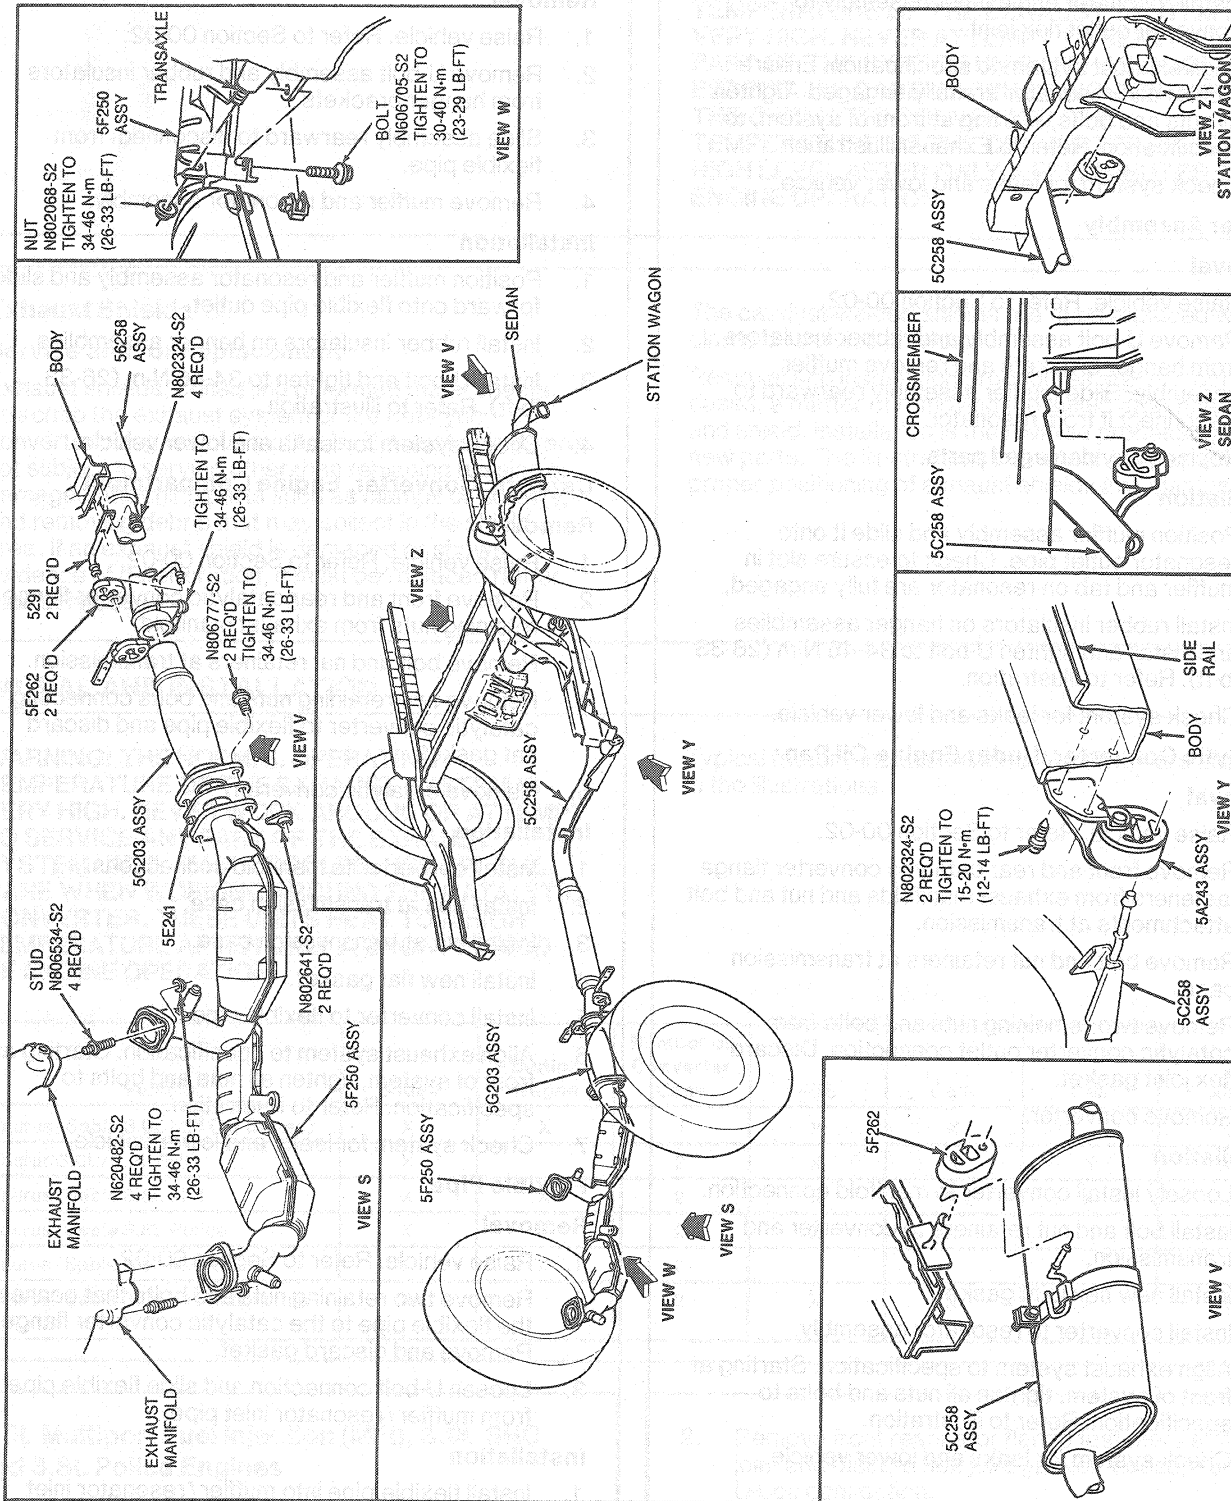

U2109-F