


REMOVAL AND INSTALLATION (Continued)

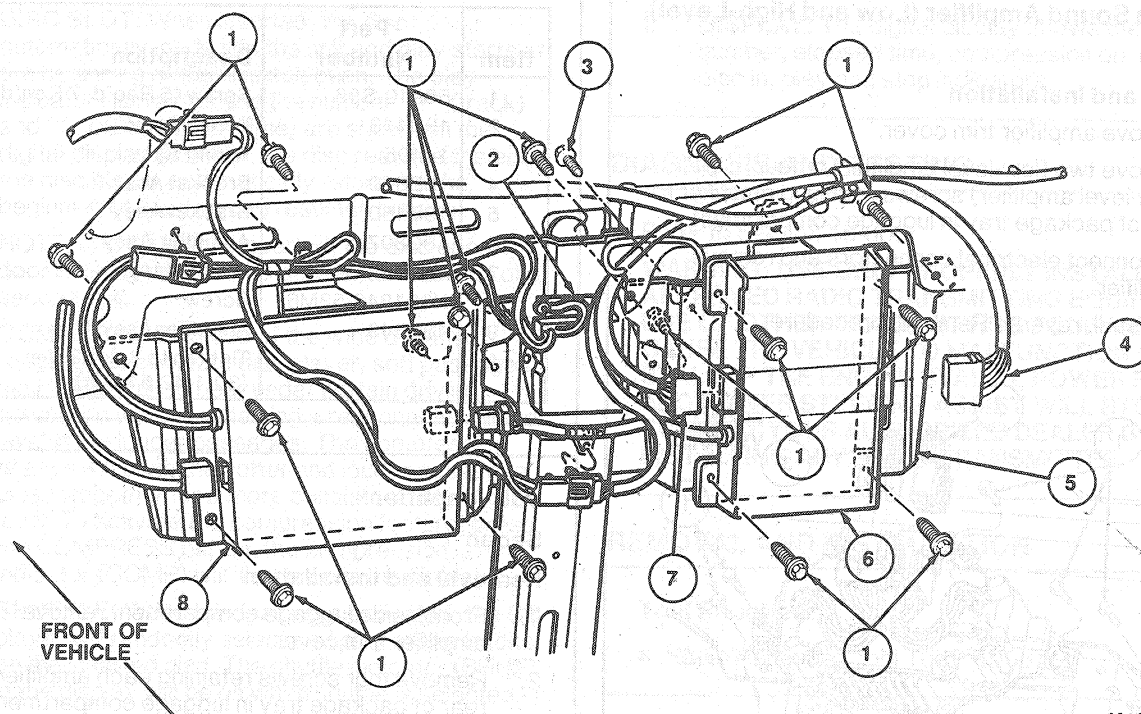

K16900-B

Item	Part Number	Description
1	56910-S36	Screw (16 Req'd)
2	19A087	Choke and Capacitor Assy
3	N801846-S36MG	Screw (1 Req'd)

(Continued)

Item	Part Number	Description
4	14405	Wiring Assy
5	19B180	Bracket Assy
6	18C807	Amplifier Assy
7	14588	Wiring Assy
8	18C808	Subwoofer Amplifier Assy

Station Wagon

Removal and Installation

1. Remove LH rear quarter trim panel. Refer to Section 01-05.
2. Reach into upper quarter panel area and hold amplifier assembly while removing two (low-level amplifier) or three (high-level amplifier) mounting screws.

3. Disconnect electrical connectors and remove amplifier.
4. To install, reverse Removal procedure.