


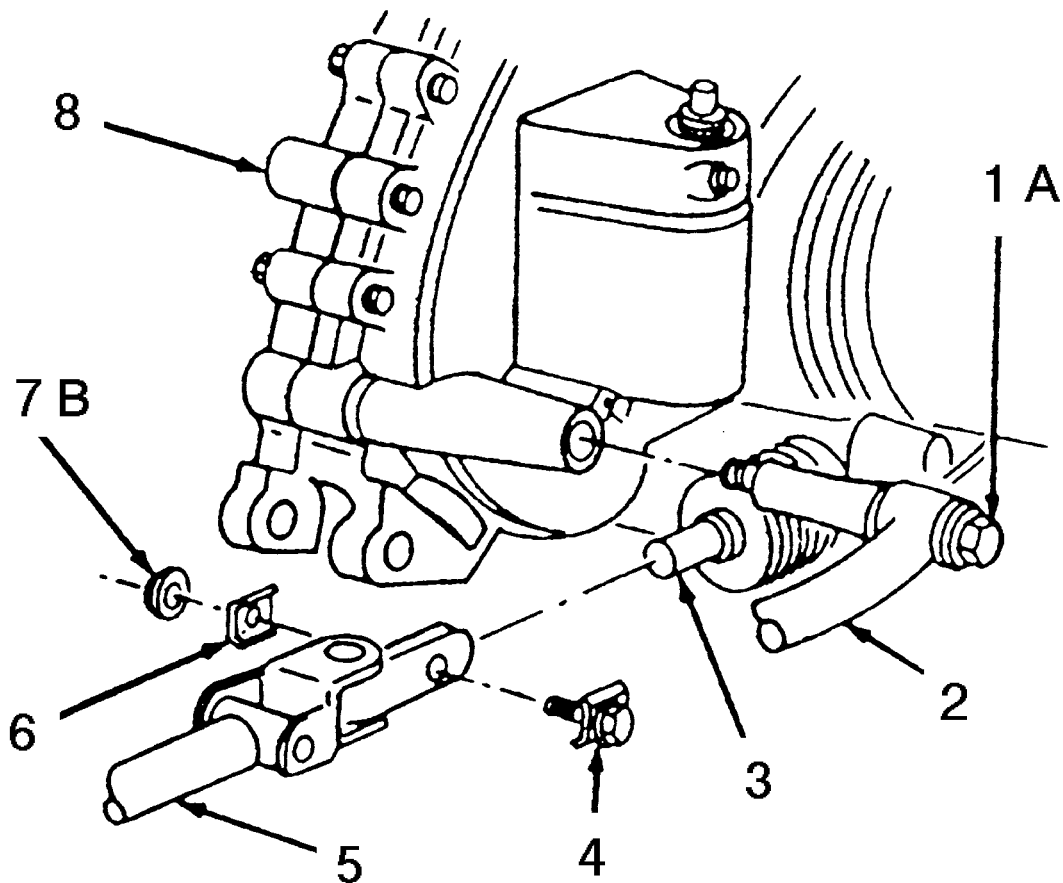

1. Nut M 12 x 1.75

2. Gear shift control

3. Input shift shaft

4. Clamp

5. Shift rod

6. Main shift control
shaft block

7. Nut M6 x 1.00

8. Transaxle assy

A. Tighten to 47-63 N.m
(35-46 lb-ft)

B. Tighten to 9-12 N.m
(80-106 lb-in)