


REMOVAL AND INSTALLATION (Continued)

REMOVAL AND INSTALLATION (Continued)

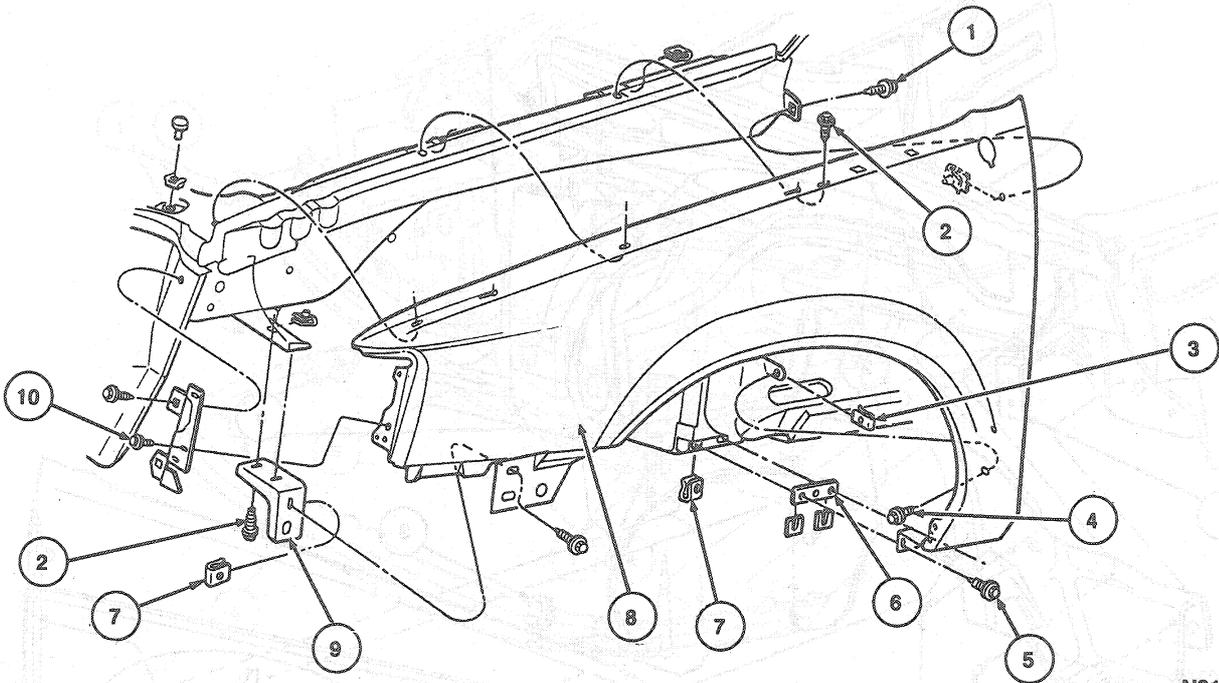

N8176-B

Item	Part Number	Description
1	N80947-S2	Screw and Washer Assy
2	N606676-S36	Bolt
3	N623332-S100	U-Nut
4	N606675-S36	Bolt
5	N606677-S2	Bolt

Item	Part Number	Description
6	N804532(RH) N804533 (LH)	Spacer
7	N801839-S53	U-Nut
8	160 15	Fender
9	—	Front Fender Mounting Bracket
10	N610958-S2	Screw

(Continued)

Cowl Vent Screen

Removal and Installation

1. Remove both windshield wiper arms from vehicle. Refer to Section 01-16.
2. Remove two side screws and eight top screws securing cowl vent screen to body.

3. Remove screen from vehicle. LH half of screen must be removed before RH half of screen.
4. To install, reverse Removal procedure.