


## IN-VEHICLE SERVICE (Continued)

Unleaded Gasoline Shown, FF Similar

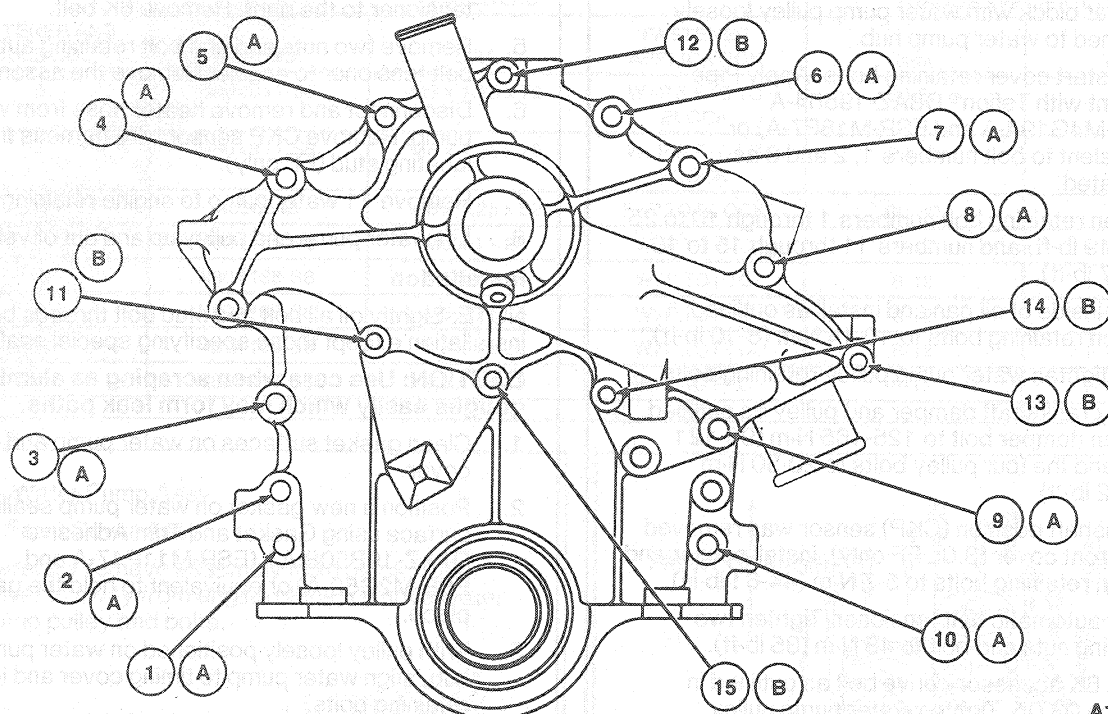

A13096-B

FASTENER AND HOLE NO.	FASTENERS			TORQUE SPECIFICATIONS	
	PART NO.	SIZE	FASTENER APPLICATION	N-m	Lb-Ft
1	N804113-S8	M8 x 1.25 x 43.5	F/C TO BLOCK	20-30	15-22
2	N804113-S100	M8 x 1.25 x 43.5	F/C TO BLOCK	20-30	15-22
3	N804811-A100	M8 x 1.25 x 70	W/P & F/C TO BLOCK	20-30	15-22
4	N804811-S8	M8 x 1.25 x 70	W/P & F/C TO BLOCK	20-30	15-22
5	N605909-S8	M8 x 1.25 x 42	F/C TO BLOCK	20-30	15-22
6	N804811-S8	M8 x 1.25 x 70	W/P & F/C TO BLOCK	20-30	15-22
7	N804811-S8	M8 x 1.25 x 70	W/P & F/C TO BLOCK	20-30	15-22
8	N804811-S8	M8 x 1.25 x 70	W/P & F/C TO BLOCK	20-30	15-22
9	N804811-S8	M8 x 1.25 x 70	W/P & F/C TO BLOCK	20-30	15-22
10	N606543	M8 x 1.25 x 52	F/C TO BLOCK	20-30	15-22
11	N804168-S8	M6 x 1 x 25	W/P TO F/C	8-12	71-106 (lb-in)
12	N804168-S8	M6 x 1 x 25	W/P TO F/C	8-12	71-106 (lb-in)
13	N804168-S8	M6 x 1 x 25	W/P TO F/C	8-12	71-106 (lb-in)
14	N804168-S8	M6 x 1 x 25	W/P TO F/C	8-12	71-106 (lb-in)
15	N804168-S8	M6 x 1 x 25	W/P TO F/C	8-12	71-106 (lb-in)

W/P—Water Pump Assy  
F/C—Front Cover Assy

T/P—Timing Pointer